




# N'RUN308

## Technical sheet

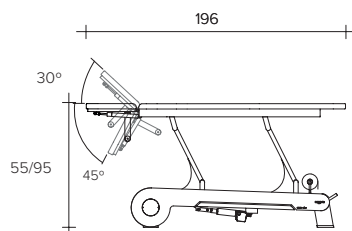

### PRODUCT DIMENSIONS (cm)



### COMPONENTS

Spradling © vinyl coating



### GENERAL SPECIFICATIONS

**Motors** 1 engine (height)  
**Dimensions (length x width)** 196 x 68 cm  
**Height (min. and max.)** 55/95 cm  
**Weight** 107 - 117 kg  
**Thickness** 5 cm  
**Density** 40 g/cm<sup>3</sup>  
**Loading capacity** 250 kg  
**Operation** Peripheral switch  
**Upholstery** Seamless round edges

### STANDARD SPECIFICATIONS

Breather hole  
 Handlebar support  
 4 wheels turning 360°  
 Peripheral switch  
 Safety block

### STANDARD COLOURS



### OPTIONS

3-section head  
 Heating

### ACCESSORIES

Paper roll holder  
 Bed cover

### TECHNICAL PARAMETERS

**Power supply** 230 V - 50/60 Hz  
**Max. Intensity** 2 A  
**Electric motor** 6.000 N  
**Safety class** II (Double)  
**Moisture resistance** IPX6 (against water jets)  
**Product classification** I (Low risk device)

### UPHOLSTERY

**Composition** 100% vinyl  
**Protective finish** Permablock®  
 Antimicrobial  
 Antifungal protection  
 Antibacterial protection  
 Antimycotic protection  
**Abrasion resistance** >300.000 cycles  
**UV-resistance** 1000 hours, blue wool scale  
**Flame retardancy** NF P 92-503 / M2